



# RETAILERS' OFFER



AGRICULTURAL IMPLEMENTS







**Mod. EFG  
Flail Mower  
105 - 125 - 145 - 155 - 165 - 175**

For 20/40 HP (15 -30 kW) tractors.  
Ideal for working on grass: orchard, nursery, vineyard, in the greenhouse and for gardening.

Cast-iron gearbox with free wheel, sturdy toothed belts, double hitches, adjustable rear roller with mud scraper, protective front bulkheads, adjustable tensioner, side skids, electronically-balanced rotor, high blade tip speed to ensure perfect cutting, knives or hammers for grass, Cat. I three-point hitch, cardan shaft support, EC safety guards.

**Mod. EFGC  
Flail Mower  
105 - 125 - 145 - 155 - 165 - 175**

For 20/40 HP (15 -30 kW) tractors.  
Ideal for working on grass: orchard, nursery, in the greenhouse, and for gardening.

Cast-iron gearbox with free wheel, sturdy toothed belts, double hitches, adjustable rear roller with mud scraper, front protection bulkheads, adjustable tensioner, side skids, electronically-balanced rotor, high blade tip speed to ensure perfect cutting, knives or hammer for grass, Cat. I universal three-point hitch cardan shaft.



**Mod. EFGCH  
Flail Mower  
105 - 125 - 145 - 155 - 165 - 175**

For 20/40 HP (15-30 kW) tractors.  
Ideal for working on grass: orchard, nursery, vineyard, in the greenhouse and gardening.

Cast-iron gearbox with free wheel, sturdy toothed belts, double hitches, adjustable rear roller with mud scraper, front protection bulkheads, adjustable tensioner, side skids, electronically-balanced rotor, high blade tip speed to ensure perfect cutting, knives or hammers for grass, Cat. I universal three-point hitch cardan shaft support, with hydraulic shift kit.





**Mod. FL**  
**Flail mower**  
**FLC 120 - FLC 160**

For 20/50 HP (15 -37 kW) tractors.

Ideal for lawns, gardens sport areas and parks.

Cast-iron gear box with free wheel, sturdy toothed belts, height-adjustable swivel wheels, hydraulic collector opening, 520 lt collector, front protection bulkheads, adjustable tensioner, electronically-balanced rotor, high blade tip speed to ensure perfect cutting, knives or hammers for grass, Cat. I universal three-point hitch, cardan shaft support, EC safety guards.



**Mod. DM**  
**Mower**  
**DM 120 - DM 150 - DM180**

Rear ejection.

For 10 30 KW (14-40 HP) tractors.

Ideal for lawns, gardens, sport areas and parks.

Sturdy gear box 1 : 2. 83, height-adjustable swivel wheels, scraper/cleaner on each wheel, 2 sturdy toothed belts, high blade tip speed, Precise blade overlap, Cat. I universal three-point hitch with floating bar linkage, Double mulching blade, cardan shaft support, 4-mm reinforced mower frame, pressed steel wheel forks, individually balanced cast-iron pulleys.

**Mod. AG 140**  
**Flail Mower**



For 40/60 HP (30/45 kW) tractors.

Ideal for working on grass and with pruned material: orchard, nursery, vineyard, in the greenhouse and gardening.

Cast-iron gearbox with free wheel, sturdy toothed belts, double hitches, adjustable rear roller with mud scraper, front protection bulkheads, adjustable tensioner, side skids, electronically-balanced rotor, high blade tip speed to ensure perfect cutting, knives or hammers for grass, Cat. II universal three-point hitch, cardan shaft support.

**Mod. AGF 140**  
**Flail Mower**



For 50/80HP (37/60 kW) tractors.

Ideal for working on grass and for pruning.

Cast-iron gearbox with free wheel, sturdy toothed belts, double hitches, adjustable rear roller with mud scraper, front protection bulkheads, adjustable tensioner, side skids, electronically-balanced rotor, high blade tip speed to ensure perfect cutting, knives or hammers for grass, Cat. II universal three-point hitch, cardan shaft support.



**Mod. ATV 120**  
**Flail Mower**

For QUAD/ATV.

Ideal for lawns, gardens, sport areas and parks.

Side Drawbar, 13 HP Engine ,Centrifugal pulley clutch, sturdy toothed belts, Height-adjustable side wheels 16.5 x 6.5.

Automatic belt tensioner, electronically-balanced rotor, high blade tip speed to ensure perfect cutting, knives or hammer for grass, EC safety guards.

**Mod. AGL 125**  
**Flail Mower**



For 35/50HP (26/37 kW) tractors.

Ideal for working on grass and for pruning.


Cast-iron gearbox with free wheel, sturdy toothed belts, double hitches, adjustable rear roller with mud scraper, front protection bulkheads, adjustable tensioner, side skids, electronically-balanced rotor, high blade tip speed to ensure perfect cutting, knives or hammers for grass, Cat. II universal three-point hitch, cardan shaft support.





**Mod. TL 95 – 115 - 135  
Rotary Tiller**

For 16/40 HP (12-30 kW) tractors.  
Suitable for soil preparation, in the vineyard, nursery, orchard, and for gardening.  
Single-speed aluminium gearbox, side chain drive in oil bath, automatic chain tensioner, 4 spiral blades per flange, adjustable skids to obtain the desired working depth, adjustable rear shield ensures best ground levelling, Cat. I and II universal three-point hitch, cardan shaft support, CE safety guards.  
The three-point hitch (mm 120) is moved mechanically by hand and does not require levers to operate.

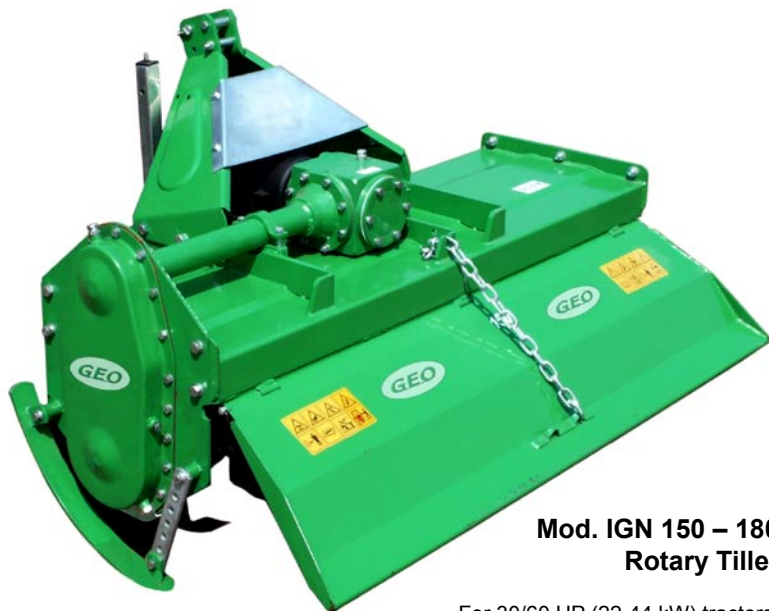

**Mod. IGN 150 – 180  
Rotary Tiller**

For 30/60 HP (22-44 kW) tractors.  
Suitable for soil preparation, in the vineyard, nursery, orchard, and for gardening.  
Single-speed cast-iron gearbox, Side chain drive, automatic chain tensioner, Four spiral blades per flange, adjustable side skids to obtain the desired working depth, Cat. I and II universal three-point hitch, EC safety guards, adjustable rear shield, cardan shaft support.

**Mod. IGNH 150  
Rotary Tiller**

For 30/60 HP (22-44 kW) tractors.  
Suitable for soil preparation, in the vineyard, nursery, orchard, and for gardening.  
Single-speed aluminium gearbox, side chain drive in oil bath, automatic chain tensioner, 6 spiral blades per flange, adjustable skids to obtain the desired working depth, adjustable rear shield ensures best ground levelling, Cat. I and II universal three-point hitch, cardan shaft support, CE safety guards.  
With hydraulic shift kit.



**Mod. SB 105 - 125 - 145 - 165  
Stone Burier**


For 20/50 HP (15 -37 kW) tractors.  
Suitable for working in orchards and for gardening.  
Sturdy cast-iron gearbox, side skids, side chain drive, automatic tensioner, cage roller, Cat. I and II universal three-point hitch, EC safety guards. The shift (120 mm) of the three-point hitch is mechanical and manual and does not require the use of levers.






### **Tipping transport box** **Mod. 100 - 120 - 140 - 160 - 180 - 200**

Time proven design for strength and reliability. Large capacity box for general purpose light duties around the farm or park. Solid construction of reinforced steel plate with heavy duty tipping hitch mechanism. Simple but positive latch with pull-cord trip mechanism and safety pin facility. Reinforced at all stress points. Reinforced floor for wear resistance and strength with inner ribs to reinforce the stress points. 3 point linkage constructed so that it is structurally very strong; the loading from 3 points is distributed so it will not cause stress failures. Cat I or II lower and top links.

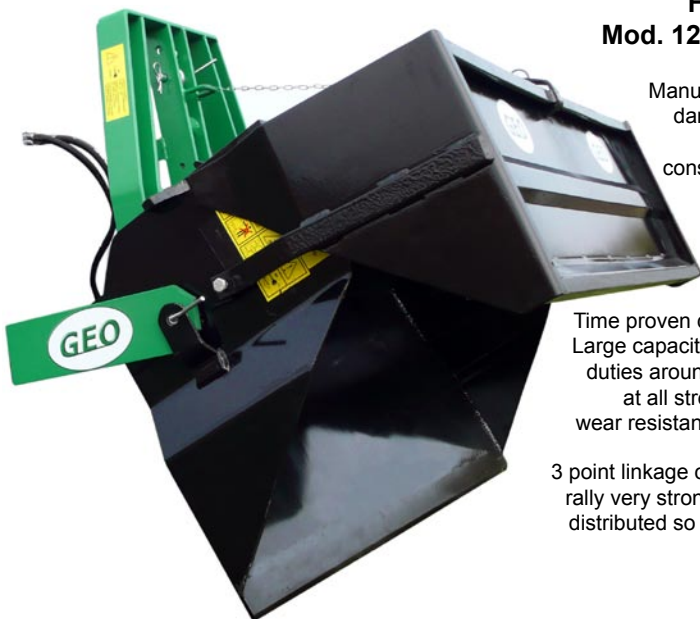

### **Hydraulic transport box** **Mod. 120 - 140 - 160 - 180 - 200**

Manufactured to the highest of standards, the hydraulic transport box has a robust and durable steel construction. Ideal for hydraulically operated loading and leveling at the rear of the tractor. Solid construction of reinforced steel plate with heavy duty double acting ram. Time proven design for strength & reliability. Large capacity box for general purpose light duties around the farm or park. Reinforced at all stress points. Reinforced floor for wear resistance and strength with inner ribs to reinforce the stress points. 3 point linkage constructed so that it is structurally very strong - the loading from 3 points is distributed so it will not cause stress failures. Cat I or II lower and top links.

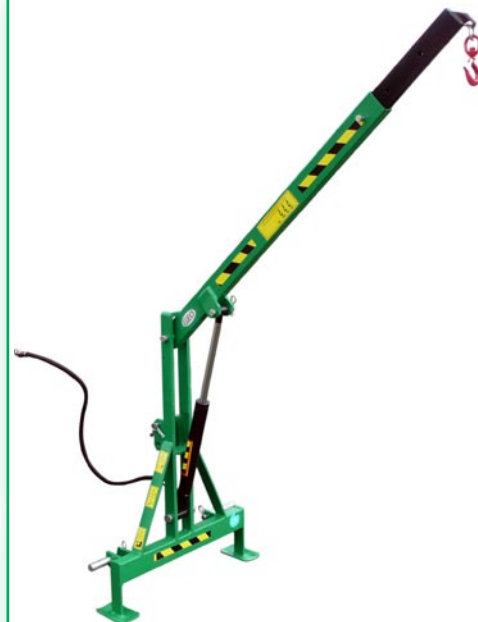


### **Mod. EL 200** **Hydraulic back elevator**

For 16/50 HP (12 -37 kW) tractors. The hydraulic back elevator has a robust and durable steel construction. Ideal for hydraulically operated lifting at the rear of the tractor. Max elevation: 180cm (tractor lift excluded), max loading 200kg. Reinforced at all stress points. Time proven design for strength & reliability. Security valve. Cat I lower and top links.

### **Mod. GP20** **Plough**

For 16/25 HP (12 -19 kW) tractors. Simple and strong construction with pieces in treated steel. Adjustable work position. Standard towing attachment in 3 points.

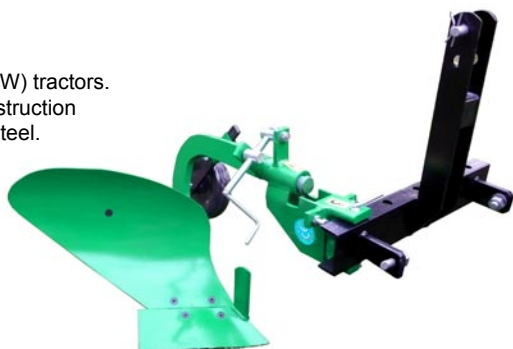

### **Mod. GRP25** **Reversible Plough**

For 16/25 HP (12 -19 kW) tractors. Simple and strong construction with pieces in treated steel. Adjustable work position. Reversible body. Standard towing attachment in 3 points.



### **Mod. GRPH 35** **Reversible Hydraulic Plough**

For 25/50 HP (19 -37 kW) tractors. Reversal hydraulic command. Independent reclining adjustment. Strong construction with pieces in treated steel.





**MOD. RM-12  
TIPPING TRAILER**

For 20/50 HP (15 -37 kW) tractors.  
210cm Long Tipping Trailer is great around any small acreage or hobby farm and can be of use every day of the year. With a hydraulic lift for tipping they are perfect for transporting soil, sand, feed, fertilisers, tools, small machinery & trees for planting. Perfect for transporting hay to all corners of your property. Removable sides. Tipping: single action 2 stage RAM.



Geo Machine Agricole  
Strada Stazione, 72  
14025 - Montechiaro Asti (AT) - ITALY  
Tel. +39 0141 901084 - Fax +39 0141 990508  
info@geoagric.com  
[www.geoagric.com](http://www.geoagric.com)