


4408f-30 - Corn
Header (02/15 -)



58 -
Attachments/headers



58.224.440 -

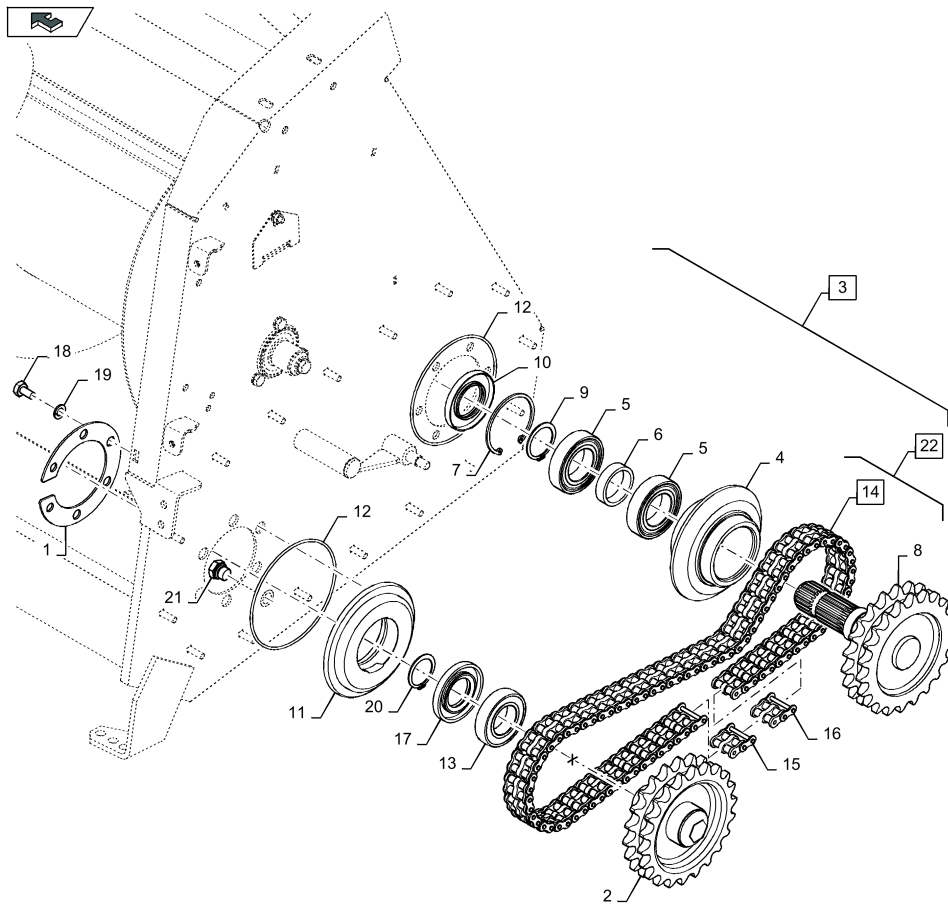

714092062, 714110001, 724001312, 724001352, 724001382, 724001412, 724002542, 724002582, 724002612, 724002642

4408F-80, 4408F-30, 4412F-30, 4408F-75

•
-

-

#				-
1	47399407		-	2
2	84578776		22T@@MAINTENANCE PART	2
2	47654166		22T@@MAINTENANCE PART	2
3	84524672		Incl 4 - I0	2
3	47819861		Incl 4 - I0	2
4	84524673		-	1
5	210045	50mm ID x	MAINTENANCE PART	2
5	87591960	50mm ID x	MAINTENANCE PART	2
6	322699050		MAINTENANCE PART	1
7	370013	M90 x 3mm Thk,	-	1
8	84524679		22T@@MAINTENANCE PART@@FOR STANDARD	1
8	47383842		24T@@MAINTENANCE PART@@FOR STANDARD	1
8	47383839		20T@@MAINTENANCE PART@@FOR SPEED	2



#				-
8	84524679		22T@@MAINTENANCE PART@@FOR SPEED	2
8	47383842		24T@@MAINTENANCE PART@@FOR SPEED	2
9	370008	M50, Ext	-	1
10	84022860	50mm ID x 90mm	-	1
11	47544891		-	2
12	47544988		-	4
13	340411240	- 45mm ID x	MAINTENANCE PART	2
14	84524716	Roller, 2 Links x 25,4 mm = 1473,2 mm L	Incl 15 - 16@@MAINTENANCE 2 PART@@FOR STANDARD	
14	47383860	Roller, 2 Links x 25,4 mm = 1498,6 mm L	Incl 15 - 16@@MAINTENANCE 2 PART@@FOR STANDARD	
14	47383858	Roller, 2 Links x 25,4 mm = 1447,8 mm L	Incl 15 - 16@@MAINTENANCE 2 PART@@FOR SPEED	
14	84524716	Roller, 2 Links x 25,4 mm = 1473,2 mm L	Incl 15 - 16@@MAINTENANCE 2 PART@@FOR SPEED	
14	47383860	Roller, 2 Links x 25,4 mm = 1498,6 mm L	Incl 15 - 16@@MAINTENANCE 2 PART@@FOR SPEED	
15	NSS		LINK, Incl in 14	1
16	NSS		CHAIN, Incl in 14	AR
17	47389270	45mm ID x 90mm	-	2
18	15540221	Hex, M12 x 1.25 x 20mm, Cl 8.8, Full Thd	-	12
19	412123	13.1mm ID x	-	12
20	370007	M45, Ext	-	2
21	87030025	. Hex, M18 x 1.5 ORB	-	2
22	47383861	- ,	Incl 8, 14@@FOR SPEED REDUCTION ONLY	1
22	47821710		Incl 8, 14@@FOR SPEED REDUCTION ONLY	1

#					
22	47383862	- ,,	Incl 8, 14@@FOR SPEED INCREASE ONLY	I	
22	47383862	- ,,	Incl 8, 14@@FOR STANDARD ONLY	I	

